

SPECIFICATION SHEET

Product Code

INTH770WH

Description

2 Gang 13A Switched Socket with USB Charging Outlet Threaded Insert



General Information	
Dimensions	127mm x 68mm x 33mm (Depth)
Material composition	Insert: Urea Rear Housing: Nylon Terminals: Brass Earth Strap: Mild Steel Terminal Screws: Steel and Yellow Passivated Internal Busbars: Formed Pressed Brass PCB: Mixed Components Silver "on-lay" copper/brass contacts.
Voltage	240V~ 50Hz
Load Rating	13A
Terminal Size	5mm ϕ
Torque Value	2.0Nm
Cable Size	4 x 2.5mm ²
Mounting Details	Suitable for mounting on material up to a thickness of 1.5mm Supplied with 3.5mm Dia. Threaded lugs pre-tapped in the Earthing steel.
Switched	Yes
Double Pole	No (Single Pole)
Twin Earth Terminals	Yes
USB Charging Outlet	5V DC, 2.1A
USB Output Connector	USB Type "A"
USB Standby Current	2mA
Operational Temperature	-5°C – +40°C


Standards	BS 5733 (BS 1363-2) BS EN 60950-1 (USB Charger) EN 61000-6-1/3, EN 61204-3 (EMC Directive)
------------------	--

Additional Information	Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
-------------------------------	--

Errors & Omissions excluded. Specification is subject to change without notice.

V1.0

SPECIFICATION SHEET

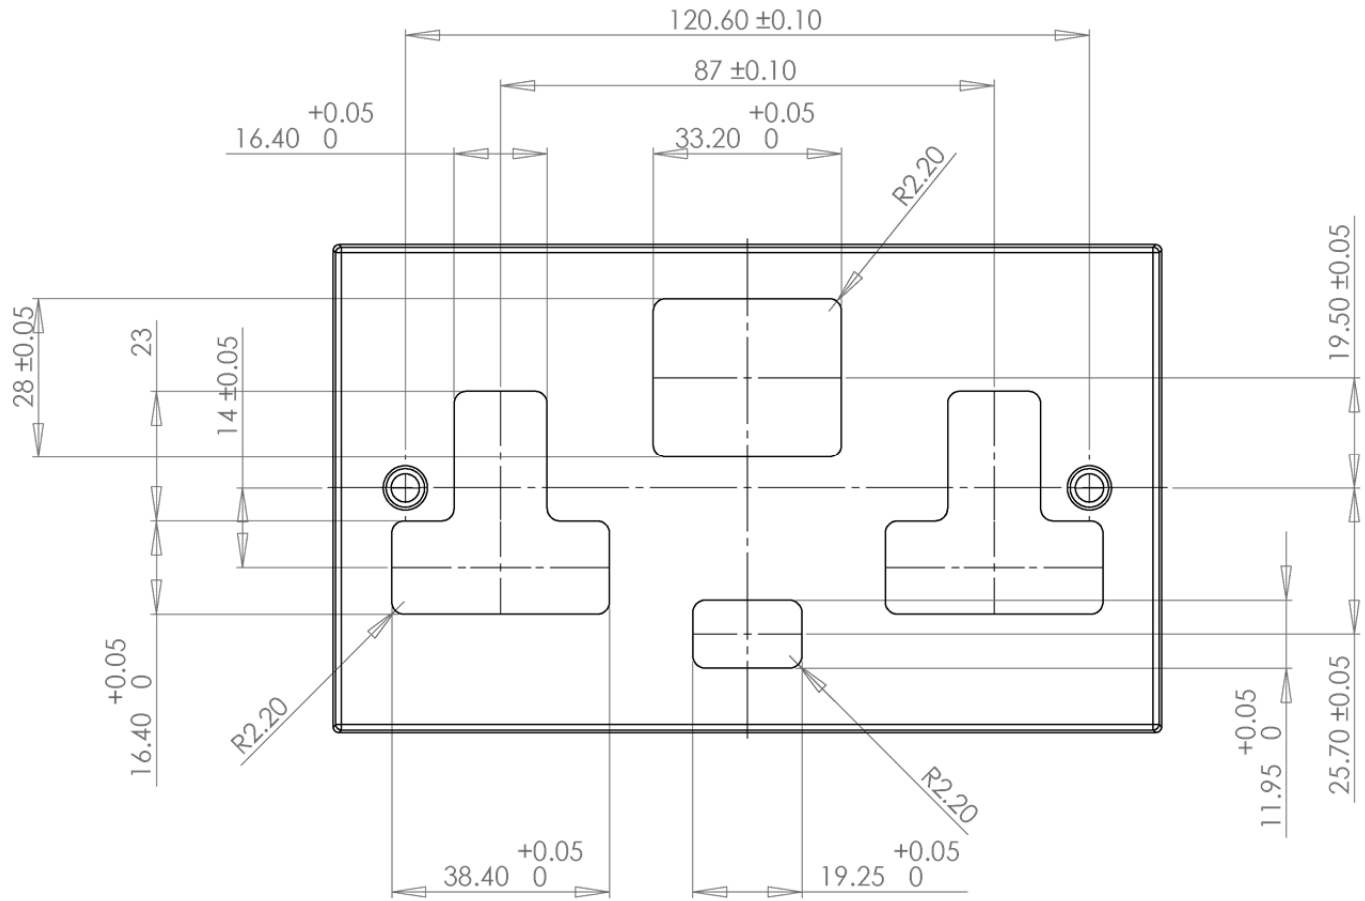

Errors & Omissions excluded. Specification is subject to change without notice.

V1.0