

500 FLOOR BOX

Standard Assembly, Trimless – Powder-coated grey

Shallow · Discreet · Unbranded · Integrated

LID

- Hinged lid in powder-coated Light Grey zintec steel (RAL7035)
- Fixed lid recess depth of max 6.5mm, suitable for carpet and vinyl
- Metal handle and plastic flaps, with 2 flaps for 3 compartments and 3 flaps for 4 compartments
- Trimless lid-frame as standard
- Flat lid in stainless steel *available as Option*



FLOOR BOX

- Rectangular as standard
- 16 sizes of floor box, ranging from 126x230mm to 387x230mm, with 4 standard-depth base box options and 5 integrated trunking options
- 1-4 compartments per floor box, matched to the number of outlet plates required
- Large choice of outlet plate configurations. Floor boxes can fit between 1-4 outlet plates



BASE BOX

- Height adjustable inner frame gives perfect on-site levelling
- Suitable for shallow sub-floors
- 4 standard base box depths of 55mm, 65mm, 85mm and 120mm
- Fixed plug-top space of 20mm for 55mm deep base box and 27mm for other base boxes
- Wiring space varies depending on base box depth and what height you set the base box
- Robust base box made of galvanised steel
- Install base box before final floor fitted or at same time as trunking as standard
- Interfaces with most cable feed types. Also integrates with flush floor and in screed trunking



PRODUCT RANGE



Standard

Product Name	No. of compartments/ outlet plates	Base box depth (mm)	Plug top space - max (fixed) (mm)	Base box size (mm)	Lid-Frame size (mm)	Feed type	Recess: Fixed (mm)
		A	B	C1 x C2	D	E	F
SBOX-514	1	55	20	132x276	126x230	Conduit	6
SBOX-518	1	65	27	132x236	126x230		
SBOX-516	1	85	27	132x236	126x230		
SBOX-512	1	120	27	132x236	126x230		
SBOX-524	2	55	20	219x276	213x230		
SBOX-528	2	65	27	213x236	213x230		
SBOX-526	2	85	27	213x236	213x230		
SBOX-522	2	120	27	213x236	213x230		
SBOX-504	3	55	20	306x276	300x230		
SBOX-508	3	65	27	306x236	300x230		
SBOX-506	3	85	27	306x236	300x230		
SBOX-502	3	120	27	306x236	300x230		
SBOX-544	4	55	20	393x276	387x230		
SBOX-548	4	65	27	393x236	387x230		
SBOX-546	4	85	27	393x236	387x230		
SBOX-542	4	120	27	393x236	387x230		

Integrated with trunking

Product Name	No. of compartments/ outlet plates	Base box depth (mm)	Plug top space - max (fixed) (mm)	Base box size (mm)	Lid-Frame size (mm)	Feed type	Recess: Fixed (mm)
		A	B	C1 x C2	D	E	F
SBOX-505-U2/U3	3	55	20	306x276	300x230	Trunking - in screed / integrated	6
SBOX-508-U2/U3	3	65	27	306x236	300x230		
SBOX-FFI2-502	3	55	20	n/a	300x230	Trunking - flush screed / integrated. No base box and supplied with length of flush floor lid and channel	
SBOX-FFI3-503	3	65	27	n/a	300x230		
SBOX-FFI5-503	4	65	27	n/a	387x230		

Product drawings

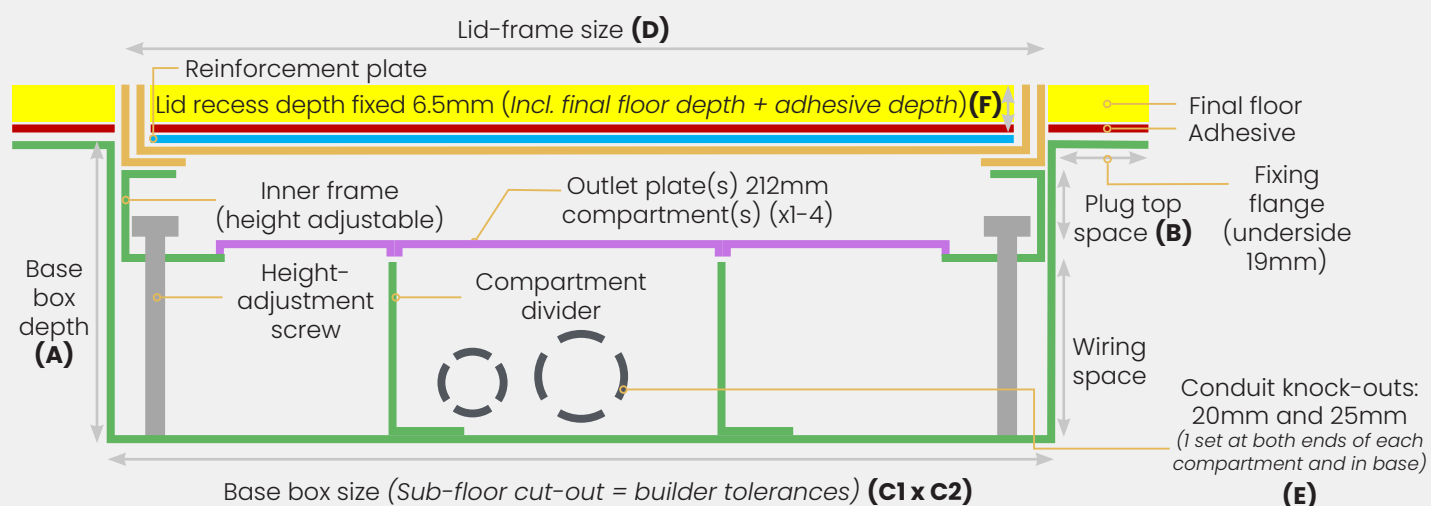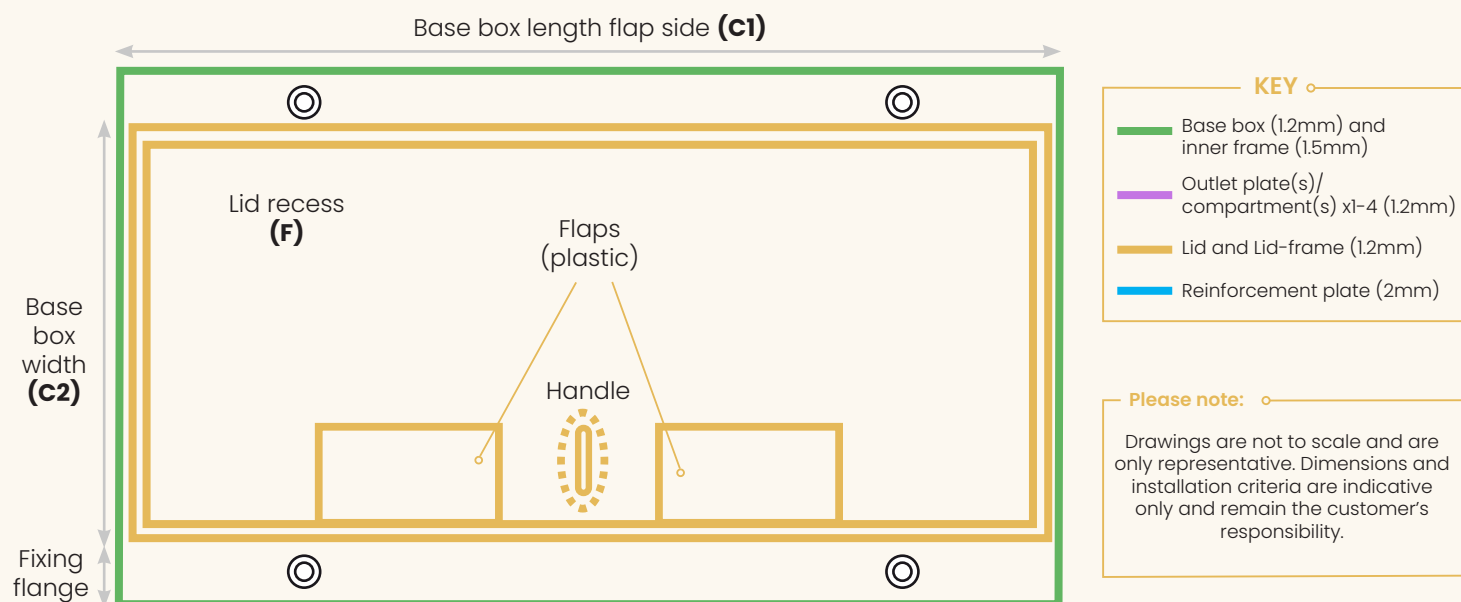

OPTIONS



OUTLET PLATE CONFIGURATIONS FOR POWER & DATA


Most popular

KEY

55+ for shallower 55mm and 65mm base boxes (side-wired)

85+ for deeper 85mm and 120mm base boxes

85+(65) for deeper 85mm and 120mm base boxes but can work with 65mm base boxes depending on module

Outlet plates (212x87mm)	Ref.	Outlet plates (212x87mm)	Ref.
 2x Euromod 50x50 module 85+(65)	559	 4x LJ6C cut outs (22.4x36.4mm) 85+(65)	591
 2x 5A unswitched	576	 2x 13A switched 85+, 55+	554
 2x 13A switched with 2x USB-A 85+	554-2USB	 2x 13A switched 1x USB-A & 1x USB-C 85+	554-USBAC
 2x 13A with latching RCD 85+	561	 1x Twin 13A switched & 1x Single 5A 85+, 65+	577
 2x 13A switched with 1x 5A socket & 2x USB-A sockets 85+	577-2USB	 Bespoke plates available	

Other options

Outlet plates (212x87mm)	Ref.	Outlet plates (212x87mm)	Ref.
 Blank Plate double	501	 2x 13A unswitched	573
 3x 13A switched 85+, 55+	588	 3x 13A unswitched 85+, 55+	590
 1x 13A switched & 1x euromod 50x50 module 85+, 55+	578	 1x single 13A switched and 1x 1 gang aperture	575
 Plate to accept 1x US Decora duplex panel mount 85+	571	 1x standard 2 gang aperture	586
 1x dished 2 gang aperture 85+	586D	 2x standard 1 gang apertures	558
 2x standard 1 gang apertures - dished 85+	558D	 3x Euromod 50x50 module 85+(65)	559-S
 4x LJ6C cut outs angled plates 85+	593	 6x LJ6C cut outs (22.4x36.4mm) 85+(65)	591-S