700 FLOOR BOX




Round, Retrofit, Trimless - Stainless Steel/Brass

Classic · With CD logo · Solid-cast handle & flap · Made-to-order · Discreet

LID

- · Robust lid made of brass or stainless steel
- Fully-flush lid with made to order lid recess. Recess depths of 3mm-30mm to match exact final floor depth and adhesive required and ensure perfectly-level final floor
- Solid-cast handle and flap with discreet CD logo (1 outlet flap as standard)
- Trimless lid-frame as standard. Trim flange available as Option
- Special finishes: antique bronze, jordan bronze, antique brass, powder-coated to RAL colour of choice, mirrored
- · Extra strength lid and flat lid available as Options

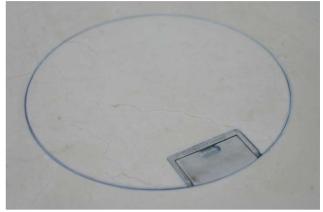

Stainless steel

FLOOR BOX

- Round. Rectangular and Square also available as standard
- 3 sizes of lid ranging from 127mm to 289mm diameter, each with 3 standard-depth base box options. Bespoke shapes & sizes possible. Round lid fits on hexagonal/octagonal base boxes
- 1-3 compartments per floor box, matched to number of outlet plates
- Large choice of outlet plate configurations. Floor boxes can fit between 1-3 outlet plates


BASE BOX


- · Height adjustable inner frame gives perfect on-site levelling
- 3 standard base box set-ups of 65mm, 85mm and 120mm (see dimension A)
- Fixed plug-top space of 28mm to 68mm, depending on base box depth
- Wiring space varies depending on base box depth and plug-top space required
- Robust base box made of galvanised steel. Needs site support in suspended floor set-up when final floor is already laid
- · Conduit cable feed only, as standard
- Retrofit base box used if floor box installed after final floor or if poured finish (i.e. polished screed or poured terrazzo). Standard assembly floor box required if installing base box before final floor fitted and if solid floor



PRODUCT RANGE

Product Name	No. of compartments/outlet plates	Base box set- up (mm deep)	Plug top space - max (fixed) (mm)	Base box size (mm)	Lid-Frame size (mm)	Feed type	Recess: Min-Max (mm)
		A	В	C1 x C2	D	E	F
SBOX-7RSR-65	1	65	28	127x127	127		3-30
SBOX-7RSR-85	1	85	38	127x127	127		3-30
SBOX-7RSR-120	1	120	68	127x127	127		3-30
SBOX-7ROR-85	2	85	38	193x193	193	Conduit	3-30
SBOX-7ROR-120	2	120	68	193x193	193		3-30
SBOX-7RLR-65	3	65	28	289x289	289		3-30
SBOX-7RLR-85	3	85	28	289x289	289		3-30
SBOX-7RLR-120	3	120	68	289x289	289		3-30

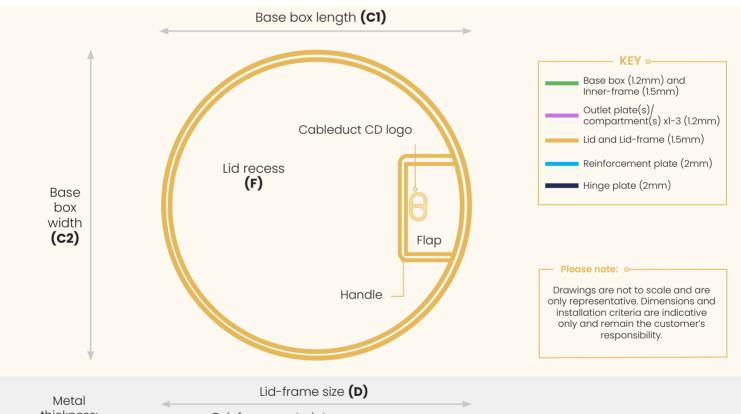

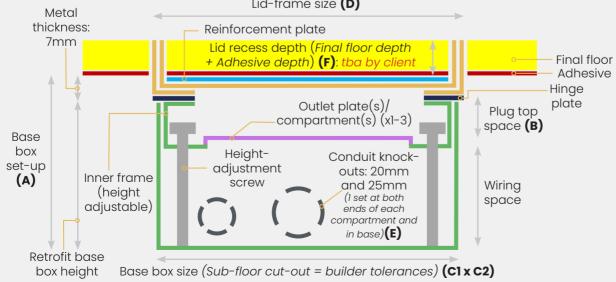

OUTLET PLATE CONFIGURATIONS FOR POWER & DATA

- KEY °

for shallower 65mm base boxes (side-wired)for deeper 85mm and 120mm base boxes

85+(65) for deeper 85mm and 120mm base boxes but can work with 65mm base boxes depending on module

3c for 3 compartment boxes only

3c(2c) 2 compartment has 1 module only

2 + 3 compartment boxes

Outlet plates (3c=161x75mm; 2c=122x62mm)	Ref.	Outlet plates (3c=161x75mm; 2c=122x62mm)	Ref.
2x Euromod 50x50 module 85+(65), 3c(2c)	7RO-59; 7ROR59	4x LJ6C cut outs (22.4x36.4mm) 85+(65)	7RO91; 7RO-R91
2x 5A unswitched	7RO-76; 7RO-R76	2x 13A switched 85+, 65+, 3c	7RO54
2x 13A switched with 2x USB-A 85+, 3c	7RO54- 2USB	2x 13A switched 1x USB-A & 1x USB-C 85+, 3c	7RO54- USBAC
2x 13A with latching RCD	7RO61; 7RO- R61	2x 13A unswitched	7RO55; 7RO- R13A
Blank Plate double	7RO-01; 7RO-R01	Plate to accept 1x US Decora duplex panel mount 85+	7RO71; 7RO-R71
lx 13A switched & lx euromod 50x50 module 85+, 65+, 3c	7RO78	Bespoke plates available	

Single socket boxes

Outlet plates (80x73mm)	Ref.	Outlet plates (80x73mm)	Ref.	
lx Euromod 50x50 module 85+(65)	7RS-R59	lx 5A unswitched	7RS-R76	
2x LJ6C cut outs (22.4x36.4mm) 85+(65)	7RS-R91	Blank Plate single	7RS-R01	
1x 13A unswitched 85+(65)	7RS-R13A			>

SHAPE





Rectangular (as standard)

Square (as standard)


Bespoke

FINISH

Standard finishes



Brass-Satin




Stainless Steel-Satin

Special finishes








Antique Bronze lacquer finish





lacquer finish



Powdercoat finish to most RAL colours, including: Bronze, Black

Mirror polished stainless steel

Mirror polished brass

OPTIONS



Mousehole cable exit



Flat lid (metal top; no recess)



Extra strength lid



Standard Assembly



Trim Flange