

$\textbf{Made-to-Order} \cdot \textbf{Discreet} \cdot \textbf{Metal} \cdot \textbf{Robust}$

RETROFIT ACCESS GROMMET

- An access grommet is for access only, no power or data sockets are fitted within the grommet
- · For cavity floor installations only
- Retrofit access grommet is installed if final floor has already been fitted or if poured finish
- Standard access grommet available as Option (trimless) if installation will be before final floor fitted

LID

- Lid-frame with trim flange, as standard. Site provision must be made regarding support as boxes are not selfsupporting
- 'Always open' with lid access hole, as standard
- Round lid in 3 sizes: *127mm, 193mm and 289mm diameter. Lid fits on mounting frame (*127mm size not recommended if hands need to pass through to reach into void)
- Robust 'loose-lay' (no hinge) lid made of brass or stainless steel
- Fully-flush lid with made to order lid recess. Recess depths of 3mm-30mm to match exact final floor depth (including adhesive layer) and to ensure perfectly-level final floor. *Flat lid available as Option*
- Standard finishes: satin Brass and satin Stainless Steel. Special finishes: Antique Bronze, Jordan Bronze, Antique Brass, Powder-coated to RAL colour of choice

MOUNTING FRAME


- Robust mounting frame is made of galvanised steel and is recommended for retrofit grommets to provide support, dimensional strength and stability
- Supported by side-fixing using pre-drilled holes in side of mounting frame. Holes are at different heights to facilitate perfect on-site levelling and 2 fixing points on opposite sides are recommended as part of site-provided support solution
- 40mm mounting frame depth
- · Bottom of mounting frame has cut-out for easy access to void



Brass





Stainless steel



PRODUCT RANGE

| Product Name | Mounting frame depth (mm) | Cut-out size (at widest; mm) | Lid-frame diameter (mm) | Recess: Min-Max (mm) | Lid access hole size: length x width (mm) |
|-----------------|------------------------------|---------------------------------|----------------------------|-------------------------|--|
| | Α | A 1 | D | F | G1 x G2 |
| GROM-RS R | 40 | 92x72 | 127 | 3-30 | 100x55 |
| GROM-ROR | 40 | 163x121 | 193 | 3-30 | 120x60 |
| GROM-RL R | 40 | 222x140 | 289 | 3-30 | 165x73 |

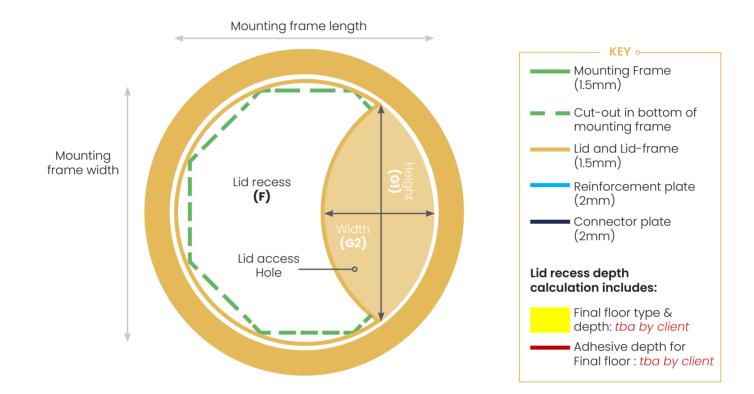

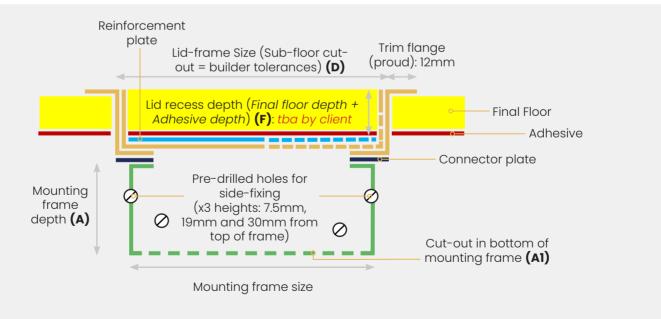

*Please note: o Drawing and cross-section are not to scale and are only representative. Dimensions and installation criteria are indicative only and intended to aid customer planning. Exact installation dimensions and actions remain the customer's responsibility.



Standard finishes






Brass-Satin

Stainless Steel-Satin






Antique Bronze lacquer finish



Jordan Bronze lacquer finish



Antique Brass lacquer finish



Powdercoat finish to most RAL colours, including: Bronze, Black

OPTIONS



Standard access grommet, trimless



Flat Lid (completely metal; no lid recess to enable you to match surrounding floor covering)