

Contemporary · Unbranded · Solid-cast handle & flaps · Made-to-order · Discreet

LID

- Robust hinged lid made of brass or stainless steel
- Lid with made to order lid recess. Recess depths of 3mm-30mm to match exact final floor depth and adhesive required and ensure perfectly-level final floor
- Unbranded solid-cast handle and flaps. Sprung-closed, with 2 outlet flaps for 3 compartments
- Lid-frame with trim flange. *Trimless lid-frame as standard*. Trim flange is cosmetic only and not load-bearing. It can be used to cover expansion gaps/inaccurate cutting
- Trim flange is proud of floor but can be rebated-in by installer to make flush with surrounding floor
- Special finishes: antique bronze, jordan bronze, antique brass, powder-coated to RAL colour of choice, mirrored
- Extra strength lid and flat lid available as Options

Stainless steel (Rectangular shown)

FLOOR BOX

- Square. Rectangular and Round also available as standard
- 3 sizes of floor box ranging from 150x150mm to 300x300mm, each with 3 standard-depth base box options. Bespoke shapes & sizes possible
- 1-3 compartments per floor box, matched to number of outlet plates
- Large choice of outlet plate configurations. Floor boxes can fit between 1-3 outlet plates

BASE BOX

- · Height adjustable inner frame gives perfect on-site levelling
- 3 standard base box set-ups of 65mm, 85mm and 120mm (see dimension A)
- Fixed plug-top space of 28mm to 68mm, depending on base box depth
- Wiring space varies depending on base box depth and plug-top space required
- Robust base box made of galvanised steel. Needs site support in suspended floor set-up when final floor is already laid
- Interfaces with most cable feed types (only 2 and 3 compartment floor boxes integrate via spigot with in screed trunking)
- Retrofit base box used if floor box installed after final floor or if poured finish (i.e. polished screed or poured terrazzo). Standard assembly floor box required if installing base box before final floor fitted and if solid floor








Rectangular trimless shown

PRODUCT RANGE

Product Name	No. of compartments/ outlet plates	Base box set- up (mm deep)	Plug top space - max (fixed) (mm)	Base box size (mm)	Lid-Frame size (mm)	Feed type	Recess: Min-Max (mm)
		Α	В	C1 x C2	D	E	F
MIN-MS6C	1	65	28	150x150	150x150		3-30
MIN-MS8C	1	85	28	150x150	150x150	Conduit	3-30
MIN-MS2C	1	120	68	150x150	150x150		3-30
MIN-MM6C	2	65	28	200x200	200x200		3-30
MIN-MM8C	2	85	28	200x200	200x200	Conduit	3-30
MIN-MM2C	2	120	68	200x200	200x200	Trunking - In	3-30
MIN-M06C	3	65	28	300x300	300x300		3-30
MIN-M08C	3	85	28	300x300	300x300	screed	3-30
MIN-M02C	3	120	68	300x300	300x300		3-30

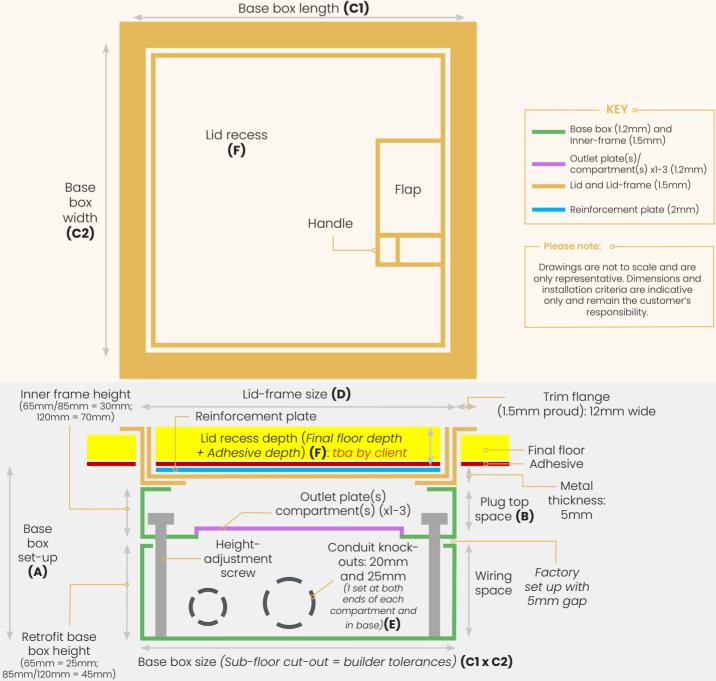

Base box size (Sub-floor cut-out = builder tolerances) (C1 x C2)

OUTLET PLATE CONFIGURATIONS FOR POWER & DATA: 2 + 3 compartment boxes

Most popular • <t< td=""></t<>								
Outlet plates (3c=212x87mm; 2c=161x75mm)	Ref.	Outlet plates (3c=212x87mm; 2c=161x75mm)	Ref.					
2x Euromod 50x50 module 85+(65)	559; 7RO59	4x LJ6C cut outs (22.4x36.4mm) 85+(65)	591; 7RO91					
2x 5A unswitched	576; 7RO76	2x 13A switched 85+, 65+	554; 7RO54					
2x 13A switched with 2x USB-A 85+	554- 2USB; 7RO54- 2USB		554- USBAC; 7RO54- USBAC					
2x 13A with latching RCD 85+	561; 7RO61	Ix Twin 13A switched & 1x Single 5A 85+, 65+, 3c	577					
2x 13A switched with 1x 5A socket & 2x USB-A sockets 85+, 3c	577- 2USB	Bespoke plates available						
(5 6	l l	, 6					

Other options

Outlet plates (3c=212x87mm; 2c=161x75mm) Ref. Outlet plates (3c=212x87mm; 2c=161x75mm) Re					
Outlet plates (30-212x8/mm, 20-161x/3mm)		Ref.	Outlet plates (3	C=212X8/mm; 2C=161X/5mm)	Ref.
	Blank Plate double	501; 7RO01	4 4	2x 13A unswitched	573; 7RO55
4"4" 4	3x 13A switched 85+, 65+, 3c	588	le di de	3x 13A unswitched 85+, 65+, 3c	590
	1x 13A switched & 1x euromod 50x50 module 85+, 65+	578; 7RO78		1x single 13A switched and 1x 1 gang aperture 3c	575
	Plate to accept 1x US Decora duplex panel mount 85+	571; 7R071		1x standard 2 gang aperture 3c	586
• • •	dished 2 gang aperture 85+, 3c	586D		2x standard 1 gang apertures 3c	558
	2x standard 1 gang apertures - dished 85+, 3c	558D		3x Euromod 50x50 module 85+(65), 3c	559-S
EE	4x LJ6C cut outs angled plates 85+, 3c	593		6x LJ6C cut outs (22.4x36.4mm) 85+(65), 3c	591-S

OUTLET PLATE CONFIGURATIONS FOR POWER & DATA: single socket

 KEY ° Most popular • o <li< th=""></li<>				
Outlet plates (95x87mm)		Ref.	Outlet plates (95x87mm)	Ref.
	1x 13A switched 85+, 65+	7RS-75W	Ix Euromod 50x50 module 85+(65)	7RS-59
	1x 13A switched with USB-A 85+	7RS-75USB	2x LJ6C cut outs (22.4x36.4mm) 85+(65)	7RS-91
••••	1x 5A unswitched	7RS-5AMP		

Other options

Outlet plates (95x87mm)		Ref.	Outlet plates (95x87mm)		Ref.	
Blank Plate	esingle	7RS01		1x 13A unswitched 85+(65)	7RS-13A	
Ix standard apertu		7RS-581 GAN		Ix 13A unswitched & 1x LJ6C cut out 85+(65)	7RS-13RJ	

SHAPE







Rectangular (as standard)

Round (as standard)

Bespoke

Special finishes

lacquer finish

Powdercoat finish to most

RAL colours, including: Bronze, Black

FINISH

Standard finishes

-0



Brass-Satin



Stainless Steel-Satin

OPTIONS



Lock



Standard assembly (Rectangular trimless shown)



Mousehole cable exit



Trimless





Flat lid (metal top; no recess)




Extra strength lid (Rectangular shown)




Jordan Bronze lacquer finish



Mirror polished stainless steel



Antique Brass lacquer finish



Mirror polished brass





Spigot for in screed trunking (Rectangular trimless standard assembly shown)