


Contemporary · Unbranded · Solid-cast handle & flaps · Made-to-order · Discreet

#### LID

- Robust hinged lid made of brass or stainless steel
- Fully-flush lid with made to order lid recess. Recess depths of 3mm-30mm to match exact final floor depth and adhesive required and ensure perfectly-level final floor
- Unbranded solid-cast handle and flaps. Sprung-closed, with 2 outlet flaps for 3 compartments
- Trimless lid-frame as standard. Trim flange available as Option
- Special finishes: antique bronze, jordan bronze, antique brass, powder-coated to RAL colour of choice, mirrored
- · Extra strength lid and flat lid available as Options

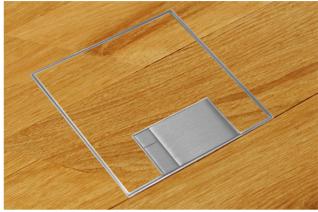

Stainless steel

### FLOOR BOX

- Square. Rectangular and Round also available as standard
- 3 sizes of floor box ranging from 150x150mm to 300x300mm, each with 3 standard-depth base box options. Bespoke shapes & sizes possible
- 1-3 compartments per floor box, matched to number of outlet plates
- Large choice of outlet plate configurations. Floor boxes can fit between 1-3 outlet plates
- IP65/when not in use (300x300mm floor box with 120mm base box only) *available as Option*

### BASE BOX

- · Height adjustable inner frame gives perfect on-site levelling
- 3 standard base box set-ups of 65mm, 85mm and 120mm (see dimension A)
- Fixed plug-top space of 28mm to 68mm, depending on base box depth
- Wiring space varies depending on base box depth and plug-top space required
- Robust base box made of galvanised steel. Needs site support in suspended floor set-up when final floor is already laid
- Interfaces with most cable feed types (only 2 and 3 compartment floor boxes integrate via spigot with in screed trunking)
- Retrofit base box used if floor box installed after final floor or if poured finish (i.e. polished screed or poured terrazzo). Standard assembly floor box required if installing base box before final floor fitted and if solid floor




Brass



Rectangular shown

#### PRODUCT RANGE

		Α	В				
			_	C1 x C2	D	Е	F
MIN-MS6C	I	65	28	150x150	150x150		3-30
MIN-MS8C	1	85	28	150x150	150x150	Conduit	3-30
MIN-MS2C	1	120	68	150x150	150x150		3-30
MIN-MM6C	2	65	28	200x200	200x200		3-30
MIN-MM8C	2	85	28	200x200	200x200	Conduit	3-30
MIN-MM2C	2	120	68	200x200	200x200	/ Tru un luin au	3-30
MIN-M06C	3	65	28	300x300	300x300	Trunking – In	3-30
MIN-M08C	3	85	28	300x300	300x300	screed	3-30
MIN-M02C	3	120	68	300x300	300x300		3-30

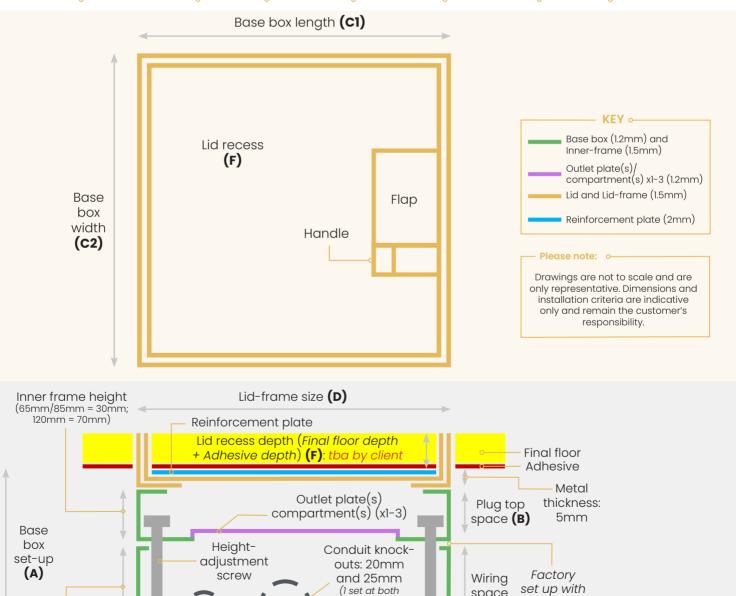

(1 set at both ends of each

compartment and in base)(E)

space

5mm gap

Retrofit base Base box size (Sub-floor cut-out = builder tolerances) (C1 x C2) box height (65mm = 25mm;

85mm/120mm = 45mm)

OUTLET PLATE CONFIGURATIONS FOR POWER & DATA: 2 + 3 compartment boxes

		° ~ °					
Most popular • • • • • •   • • • • • • • •   • • • • • • • • •   • • • • • • • • •   • • • • • • • • •   •							
Outlet plates (3c=212x87mm; 2c=161x75mm)	Ref.	Outlet plates (3c=212x87mm; 2c=161x75mm)	Ref.				
2x Euromod 50x50 module 85+(65)	559; 7RO59	4x LJ6C cut outs (22.4x36.4mm) 85+(65)	591; 7RO91				
2x 5A unswitched	576; 7RO76	2x 13A switched 85+, 65+	554; 7RO54				
2x 13A switched with 2x USB-A 85+	554- 2USB; 7RO54- 2USB		554- USBAC; 7RO54- USBAC				
2x 13A with latching RCD 85+	561; 7RO61	Ix Twin 13A switched & 1x Single 5A 85+, 65+, 3c	577				
2x 13A switched with 1x 5A socket & 2x USB-A sockets 85+, 3c	577- 2USB	Bespoke plates available					
(	b d	l l	, 6				

Other options

			- 010-07 0- 101-75)	Def	
Outlet plates (3c=212x87mm; 2c=161x75mm)		Ref.	Outlet plates (3	c=212x87mm; 2c=161x75mm)	Ref.
	Blank Plate double	501; 7RO01	4 4	2x 13A unswitched	573; 7RO55
4"4" 4	3x 13A switched 85+, 65+, 3c	588	le di de	3x 13A unswitched <b>85+, 65+, 3c</b>	590
	1x 13A switched & 1x euromod 50x50 module <b>85+, 65+</b>	578; 7RO78		1x single 13A switched and 1x 1 gang aperture <b>3c</b>	575
	Plate to accept 1x US Decora duplex panel mount <b>85+</b>	571; 7R071		1x standard 2 gang aperture <b>3c</b>	586
• • •	dished 2 gang aperture 85+, 3c	586D		2x standard 1 gang apertures <b>3c</b>	558
	2x standard 1 gang apertures - dished <b>85+, 3c</b>	558D		3x Euromod 50x50 module 85+(65), 3c	559-S
EE	4x LJ6C cut outs angled plates 85+, 3c	593		6x LJ6C cut outs (22.4x36.4mm) <b>85+(65), 3c</b>	591-S

# OUTLET PLATE CONFIGURATIONS FOR POWER & DATA: single socket

Most popular					
Outlet plates (95x87mm)		Ref.	Outlet plates (95x87mm)	Ref.	
	1x 13A switched 85+, 65+	7RS-75W	Ix Euromod 50x50 module 85+(65)	7RS-59	
	1x 13A switched with USB-A <b>85+</b>	7RS-75USB	2x LJ6C cut outs (22.4x36.4mm) <b>85+(65)</b>	7RS-91	
••••	1x 5A unswitched	7RS-5AMP			

# Other options

Outlet plates (95x87mm)		Ref.	Outlet plates (95x87mm)		Ref.	
Blank Plate	esingle	7RS01		1x 13A unswitched 85+(65)	7RS-13A	
Ix standard apertu		7RS-581 GAN		Ix 13A unswitched & 1x LJ6C cut out <b>85+(65)</b>	7RS-13RJ	

#### SHAPE







Rectangular (as standard)

Round (as standard)

Bespoke


## FINISH

#### Standard finishes

-0



Brass-Satin




Stainless Steel-Satin

# OPTIONS





Antique Bronze lacquer finish




Powdercoat finish to most RAL colours, including: Bronze, Black




Jordan Bronze lacquer finish



Mirror polished stainless steel



Antique Brass lacquer finish



Mirror polished brass



Lock



Standard assembly (Rectangular shown)



Mousehole cable exit



Trim Flange



Brush cable exit



Spigot for in screed trunking (Rectangular standard assembly shown)



Flat lid (metal top; no recess)



IP65 when not in use

(300x300mm only)



Extra strength lid

