700 FLOOR BOX

Square, Retrofit, Trim Flange - Stainless Steel/Brass

Classic • With CD logo • Solid-cast handle & flap • Made-to-order • Discreet

LID

- Robust hinged lid made of brass or stainless steel
- Lid with made to order lid recess. Recess depths of 3mm-30mm to match exact final floor depth and adhesive required and ensure perfectly-level final floor
- Solid-cast handle and flap with discreet CD logo (1 outlet flap as standard)
- Lid-frame with trim flange. *Trimless lid-frame as standard.* Trim flange is cosmetic only and not load-bearing. It can be used to cover expansion gaps/inaccurate cutting
- Trim flange is proud of floor but can be rebated-in by installer to make flush with surrounding floor
- Special finishes: Antique Bronze, Jordan Bronze, Antique Brass, Vintage Copper, powder-coated to RAL colour of choice, mirrored
- Extra strength lid and flat lid *available as options*

Stainless steel

FLOOR BOX

- Square. Rectangular and Round also available as standard
- 3 sizes of floor box ranging from 150x150mm to 300x300mm, each with 3 standard-depth base box options. Bespoke shapes & sizes possible
- 1-3 compartments per floor box, matched to number of outlet plates
- Large choice of outlet plate configurations. Floor boxes can fit between 1-3 outlet plates

Brass

BASE BOX

- Height adjustable inner frame gives perfect on-site levelling
- 3 standard base box set-ups of 65mm, 85mm and 120mm *(see dimension A)*
- Fixed plug-top space of 28mm to 68mm, depending on base box depth
- Wiring space varies depending on base box depth and plug-top space required
- Robust base box made of galvanised steel. Needs site support in suspended floor set-up when final floor is already laid
- Interfaces with most cable feed types (only 2 and 3 compartment floor boxes integrate via spigot with in screed trunking)
- Retrofit base box used if floor box installed after final floor or if poured finish (i.e. polished screed or poured terrazzo). Standard assembly floor box required if installing base box before final floor fitted and if solid floor

Rectangular trimless shown

020 8683 1126 | sales@cableductuk.com | www.cableductuk.com

Cableduct Limited, 30 Selhurst Road, London SE25 5QF. Registered Company Number 00364046

PRODUCT RANGE

Product Name	No. of compartments/ outlet plates	Base box set-up (mm deep)	Plug top space - max (fixed) (mm)	Base box size (mm)	Lid-Frame size (mm)	Feed type	Recess: Min-Max (mm)
		A	**B**	**C1 x C2**	**D**	**E**	**F**
SBOX-7S6	1	65	28	150x150	150x150	Conduit	3-30
SBOX-7S8	1	85	28	150x150	150x150		3-30
SBOX-7S2	1	120	68	150x150	150x150		3-30
SBOX-7M6	2	65	28	200x200	200x200	Conduit / Trunking - In screed	3-30
SBOX-7M8	2	85	28	200x200	200x200		3-30
SBOX-7M2	2	120	68	200x200	200x200		3-30
SBOX-706	3	65	28	300x300	300x300		3-30
SBOX-708	3	85	28	300x300	300x300		3-30
SBOX-702	3	120	68	300x300	300x300		3-30

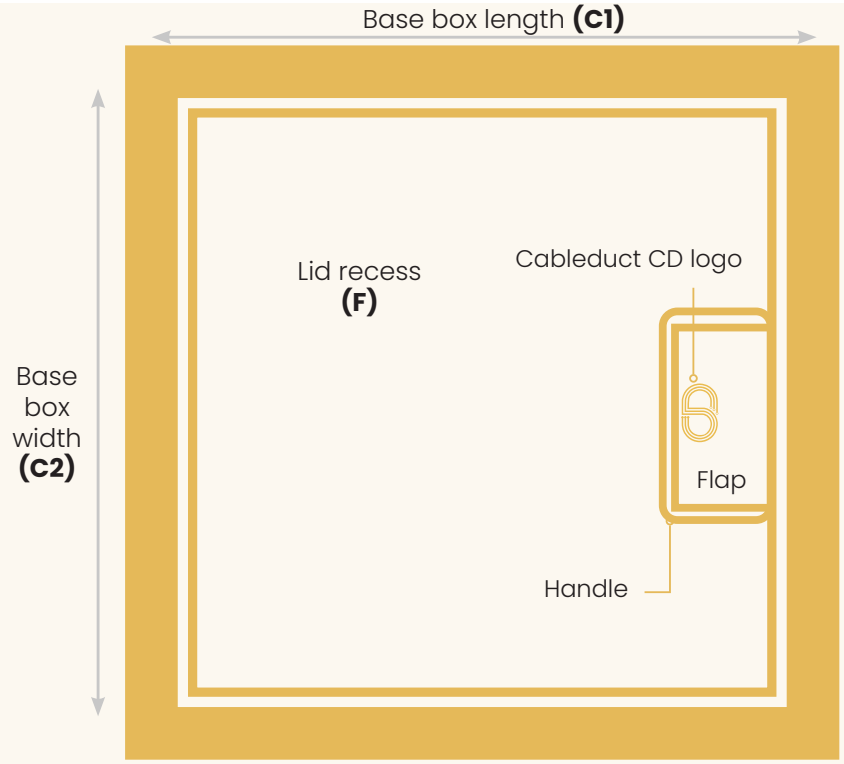

KEY

- Base box (1.2mm) and Inner-frame (1.5mm)
- Outlet plate(s)/ compartment(s) x1-3 (1.2mm)
- Lid and Lid-frame (1.5mm)
- Reinforcement plate (2mm)

Please note:

Drawings are not to scale and are only representative. Dimensions and installation criteria are indicative only and remain the customer's responsibility.

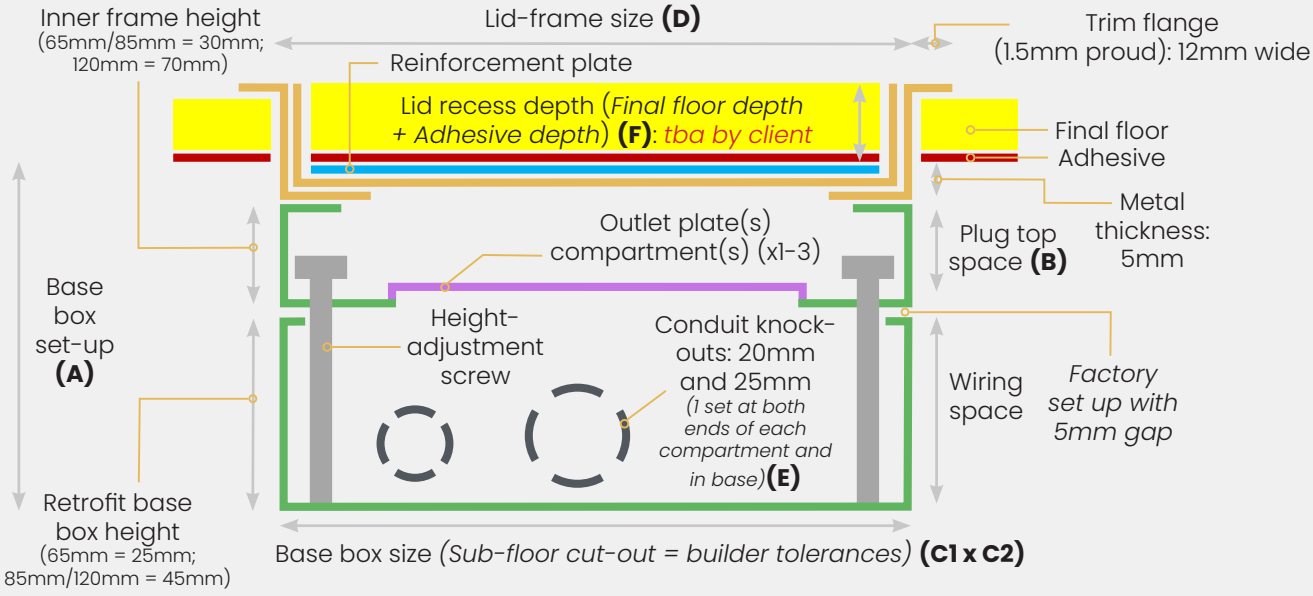

OUTLET PLATE CONFIGURATIONS FOR POWER & DATA: 2 + 3 compartment boxes

KEY

65+	for shallower 65mm base boxes (side-wired)
85+	for deeper 85mm and 120mm base boxes
85+(65)	for deeper 85mm and 120mm base boxes but can work with 65mm base boxes depending on module
3c	for 3 compartment boxes only

Most popular

Outlet plates (3c=212x87mm; 2c=161x75mm)	Ref.	Outlet plates (3c=212x87mm; 2c=161x75mm)	Ref.
2x Euromod 50x50 module **85+(65)**	559; 7RO59	4x LJ6C cut outs (22.4x36.4mm) **85+(65)**	591; 7RO91
2x 5A unswitched	576; 7RO76	2x 13A switched **85+, 65+**	554; 7RO54
2x 13A switched with 2x USB-A **85+**	554-2USB; 7RO54-2USB	2x 13A switched 1x USB-A & 1x USB-C **85+**	554-USBAC; 7RO54-USBAC
2x 13A with latching RCD **85+**	561; 7RO61	1x Twin 13A switched & 1x Single 5A **85+, 65+, 3c**	577
2x 13A switched with 1x 5A socket & 2x USB-A sockets **85+, 3c**	577-2USB	Bespoke plates available	

Other options

Outlet plates (3c=212x87mm; 2c=161x75mm)	Ref.	Outlet plates (3c=212x87mm; 2c=161x75mm)	Ref.
Blank Plate double	501; 7RO01	2x 13A unswitched	573; 7RO55
3x 13A switched **85+, 65+, 3c**	588	3x 13A unswitched **85+, 65+, 3c**	590
1x 13A switched & 1x euromod 50x50 module **85+, 65+**	578; 7RO78	1x single 13A switched and 1x 1 gang aperture **3c**	575
Plate to accept 1x US Decora duplex panel mount **85+**	571; 7RO71	1x standard 2 gang aperture **3c**	586
1x dished 2 gang aperture **85+, 3c**	586D	2x standard 1 gang apertures **3c**	558
2x standard 1 gang apertures - dished **85+, 3c**	558D	3x Euromod 50x50 module **85+(65), 3c**	559-S
4x LJ6C cut outs angled plates **85+, 3c**	593	6x LJ6C cut outs (22.4x36.4mm) **85+(65), 3c**	591-S

OUTLET PLATE CONFIGURATIONS FOR POWER & DATA: Single socket

KEY

65+ for shallower 65mm base boxes (side-wired)
85+ for deeper 85mm and 120mm base boxes
85+(65) for deeper 85mm and 120mm base boxes but can work with 65mm base boxes depending on module

Most popular

Outlet plates (95x87mm)	Ref.	Outlet plates (95x87mm)	Ref.
1x 13A switched **85+, 65+**	7RS-75W	1x Euromod 50x50 module **85+(65)**	7RS-59
1x 13A switched with USB-A **85+**	7RS-75USB	 2x LJ6C cut outs (22.4x36.4mm) **85+(65)**	7RS-91
1x 5A unswitched	7RS-5AMP		

Other options

Outlet plates (95x87mm)	Ref.	Outlet plates (95x87mm)	Ref.
Blank Plate single	7RS01	1x 13A unswitched **85+(65)**	7RS-13A
 1x standard 1 gang aperture	7RS-581 GAN	x 13A unswitched & 1x LJ6C cut out **85+(65)**	7RS-13RJ

SHAPE

Rectangular **(as standard)**

Round **(as standard)**

Bespoke

FINISH

Standard finishes

Satin Brass

Satin Stainless Steel

Special finishes

Antique Bronze lacquer finish

Jordan Bronze lacquer finish



Antique Brass lacquer finish



Vintage Copper lacquer finish

Powdercoat finish to most RAL colours, including: Bronze, Black

Mirror polished stainless steel

Mirror polished brass

OPTIONS

Lock

Mousehole cable exit

Flat lid (metal top; no recess)

Extra strength lid

Standard Assembly
(Rectangular shown)

Trimless

Spigot for in screed trunking
(Rectangular trimless standard assembly shown)