700 FLOOR BOX




Round, Standard Assembly, Trimless - Stainless Steel/Brass

$\textbf{Classic} \cdot \textbf{With CD logo} \cdot \textbf{Solid-cast handle \& flap} \cdot \textbf{Made-to-order} \cdot \textbf{Discreet}$

HD

- · Robust lid made of brass or stainless steel
- Fully-flush lid with made to order lid recess. Recess depths of 3mm-30mm to match exact final floor depth and adhesive required and ensure perfectly-level final floor
- Solid-cast handle and flap with discreet CD logo (1 outlet flap as standard)
- Trimless lid-frame as standard. Trim flange available as Option
- Special finishes: antique bronze, jordan bronze, antique brass, powder-coated to RAL colour of choice, mirrored
- Extra strength lid and flat lid available as Options

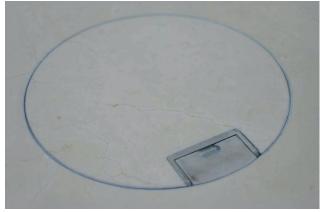

Stainless steel

FLOOR BOX

- Round. Rectangular and Square also available as standard
- 3 sizes of lid ranging from 127mm to 289mm diameter, each with 3 standard-depth base box options. Bespoke shapes & sizes possible. Round lid fits in rectangular/square base box
- 1-3 compartments per floor box, matched to number of outlet plates
- Large choice of outlet plate configurations. Floor boxes can fit between 1-3 outlet plates



Brass


BASE BOX

- · Height adjustable inner frame gives perfect on-site levelling
- 3 standard base box depths of 65mm, 85mm and 120mm
- Fixed plug-top space of 28mm to 68mm, depending on base box depth
- Wiring space varies depending on base box depth and plug-top space required
- · Robust base box made of galvanised steel
- Interfaces with most cable feed types (only 2 and 3 compartment floor boxes integrate via spigot with in screed trunking)
- Install base box before final floor fitted as standard. Retrofit base box available as Option if floor box installed after final floor or if poured finish (i.e. polished screed or poured terrazzo)



PRODUCT RANGE

Product Name	No. of compartments/outlet plates	Base box depth (mm)	Plug top space - max (fixed) (mm)	Base box size (mm)	Lid-Frame size (mm)	Feed type	Recess: Min-Max (mm)
		A	В	C1 x C2	D	E	F
SBOX-7RS-65	1	65	28	160x160	127		15-30
SBOX-7RS-85	1	85	38	160x160	127	Conduit	3-30
SBOX-7RS-120	1	120	68	160x160	127		3-30
SBOX-7RO-85	2	85	38	260x243	193		3-30
SBOX-7RO-120	2	120	68	260x243	193	Conduit /	3-30
SBOX-7RL-65	3	65	28	310x310	289	Trunking	15-30
SBOX-7RL-85	3	85	28	310x310	289	- In screed	3-30
SBOX-7RL-120	3	120	68	310x310	289	33.304	3-30

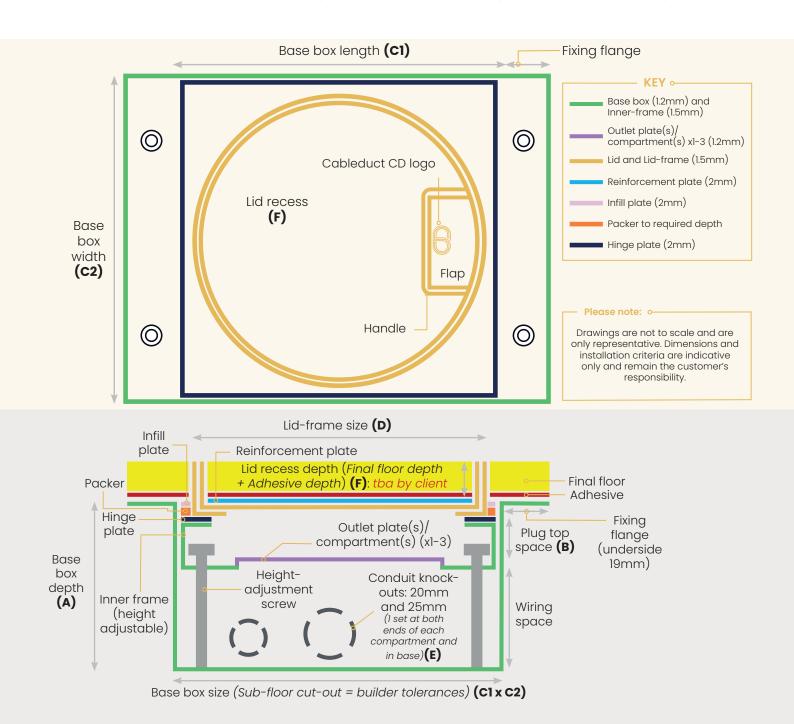

OUTLET PLATE CONFIGURATIONS FOR POWER & DATA

2 + 3 compartment boxes

65+ for shallower 65mm base boxes (side-wired)

85+ for deeper 85mm and 120mm base boxes

85+(65) for deeper 85mm and 120mm base boxes but can work with 65mm base boxes depending on module

Outlet plates (161x75mm)		Ref.	Outlet plates (161x75mm)	Ref.
	2x Euromod 50x50 module 85+(65)	7RO59	4x LJ6C cut outs (22.4x36.4mm) 85+(65)	7RO91
.TT.	2x 5A unswitched	7RO76	2x 13A switched 85+, 65+	7RO54
	2x 13A switched with 2x USB-A 85+	7RO54- 2USB	2x 13A switched 1x USB-A & 7 1x USB-C 85+	7RO54- USBAC
	2x 13A with latching RCD 85+	7RO61	2x 13A unswitched	7RO55
	Blank Plate double	7ROO1	Plate to accept lx US Decora duplex panel mount 85+	7RO71
	lx 13A switched & lx euromod 50x50 module 85+,65+	7RO78	Bespoke plates available	

Single socket boxes

	•					
Outlet plates (95x87mm)		Ref.	Outlet plates (95x87mm)		Ref.	
	1x 13A switched 85+,65+	7RS-75W		1x Euromod 50x50 module 85+(65)	7RS-59	
	1x 13A switched with USB-A 85+	7RS-75USB		2x LJ6C cut outs (22.4x36.4mm) 85+(65)	7RS-91	
	1x 5A unswitched	7RS-5AMP		1x 13A unswitched 85+(65)	7RS-13A	
	Blank Plate single	7RS01		lx 13A unswitched & lx LJ6C cut out 85+(65)	7RS-13RJ	
	lx standard 1 gang aperture	7RS-581 GAN)	

SHAPE





Rectangular (as standard)

Square (as standard)

Bespoke

FINISH

Standard finishes



Brass-Satin




Stainless Steel-Satin

Special finishes








lacquer finish





Powdercoat finish to most RAL colours, including: Bronze, Black

Mirror polished stainless steel

Mirror polished brass

OPTIONS



Mousehole cable exit



Retrofit



Flat lid (metal top; no recess)





Trim Flange

Spigot for in screed trunking (Rectangular shown)