

# MINIMA FLOOR BOX

Rectangular, Standard Assembly, Trimless - Stainless Steel/Brass

Contemporary · Unbranded · Solid-cast handle & flaps · Made-to-order · Discreet

## LID

- Robust hinged lid made of brass or stainless steel
- Fully-flush lid with made to order lid recess. Recess depths of 3mm-30mm to match exact final floor depth and adhesive required and ensure perfectly-level final floor
- Unbranded solid-cast handle and flaps. Sprung-closed, with 2 outlet flaps for 3-4 compartments
- Trimless lid-frame as standard. *Trim flange available as Option*
- Special finishes: antique bronze, jordan bronze, antique brass, powder-coated to RAL colour of choice, mirrored
- Extra strength lid and flat lid *available as Options*



*Stainless steel*

## FLOOR BOX

- Rectangular. Square and Round also available as standard
- 4 sizes of floor box ranging from 250x148mm to 407x250mm, each with 3 standard-depth base box options. Bespoke shapes & sizes possible
- 1-4 compartments per floor box, matched to number of outlet plates
- Large choice of outlet plate configurations. Floor boxes can fit between 1-4 outlet plates
- IP65/when not in use (120mm base box only) *available as Option*



*Brass*



## BASE BOX

- Height adjustable inner frame gives perfect on-site levelling
- 3 standard base box depths of 65mm, 85mm and 120mm
- Fixed plug-top space of 28mm to 68mm, depending on base box depth
- Wiring space varies depending on base box depth and plug-top space required
- Robust base box made of galvanised steel
- Interfaces with most cable feed types
- Install base box before final floor fitted as standard. Retrofit base box available as Option if floor box installed after final floor or if poured finish (i.e. polished screed or poured terrazzo)



PRODUCT RANGE

Product Name	No. of compartments/ outlet plates	Base box depth (mm)	Plug top space - max (fixed) (mm)	Base box size (mm)	Lid-Frame size (mm)	Feed type	Recess: Min-Max (mm)
		A	B	C1 x C2	D	E	F
MIN-M16C	1	65	28	260x158	250x148	Conduit / Trunking - In screed	10-30
MIN-M18C	1	85	28	260x158	250x148		3-30
MIN-M12C	1	120	68	260x158	250x148		3-30
MIN-M26C	2	65	28	243x260	233x250		10-30
MIN-M28C	2	85	28	243x260	233x250		3-30
MIN-M22C	2	120	68	243x260	233x250		3-30
MIN-M36C	3	65	28	330x260	320x250		10-30
MIN-M38C	3	85	28	330x260	320x250		3-30
MIN-M32C	3	120	68	330x260	320x250		3-30
MIN-M46C	4	65	28	417x260	407x250		10-30
MIN-M48C	4	85	28	417x260	407x250		3-30
MIN-M42C	4	120	68	417x260	407x250		3-30

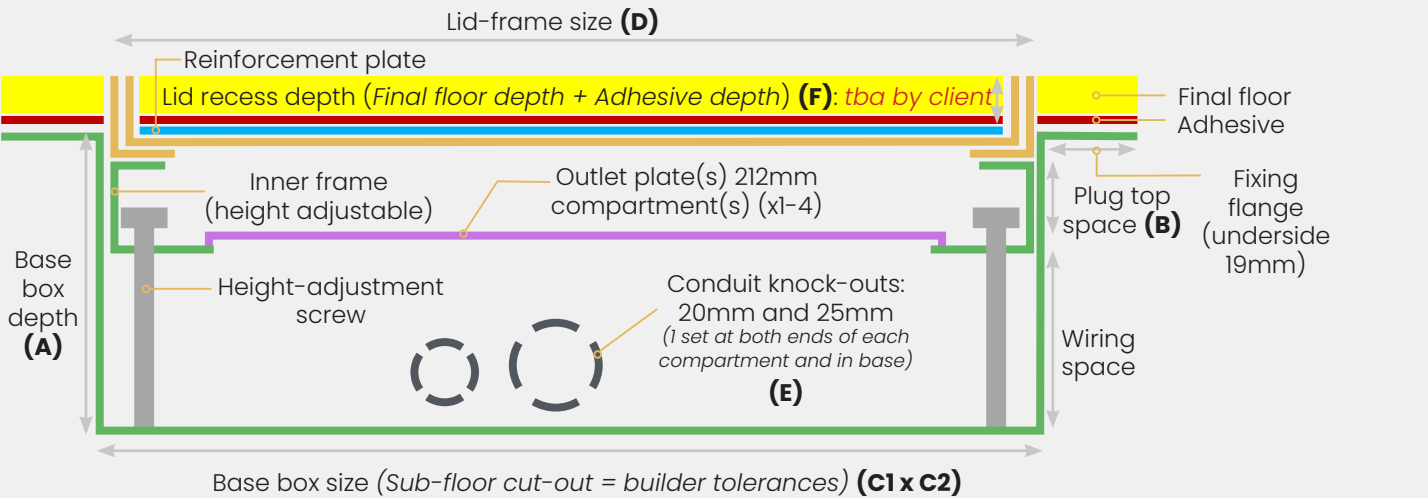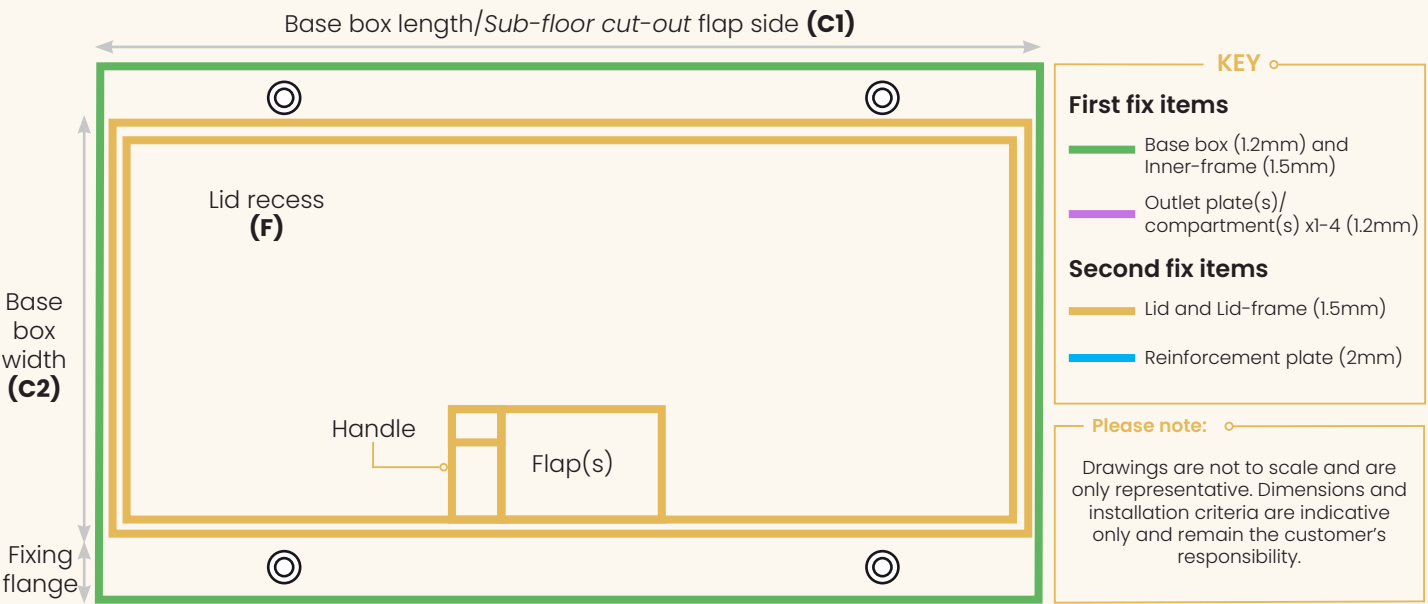

# OUTLET PLATE CONFIGURATIONS FOR POWER & DATA











Most popular

## KEY















**65+** for shallower 65mm base boxes (side-wired)

**85+** for deeper 85mm and 120mm base boxes

**85+(65)** for deeper 85mm and 120mm base boxes but can work with 65mm base boxes depending on module


Outlet plates (212x87mm)	Ref.	Outlet plates (212x87mm)	Ref.
 2x Euromod 50x50 module <b>85+(65)</b>	559	 4x LJ6C cut outs (22.4x36.4mm) <b>85+(65)</b>	591
 2x 5A unswitched	576	 2x 13A switched <b>85+, 65+</b>	554
 2x 13A switched with 2x USB-A <b>85+</b>	554-2USB	 2x 13A switched 1x USB-A & 1x USB-C <b>85+</b>	554-USBAC
 2x 13A with latching RCD <b>85+</b>	561	 1x Twin 13A switched & 1x Single 5A <b>85+, 65+</b>	577
 2x 13A switched with 1x 5A socket & 2x USB-A sockets <b>85+</b>	577-2USB	 Bespoke plates available	

Other options

Outlet plates (212x87mm)	Ref.	Outlet plates (212x87mm)	Ref.
 Blank Plate double	501	 2x 13A unswitched	573
 3x 13A switched <b>85+, 65+</b>	588	 3x 13A unswitched <b>85+, 65+</b>	590
 1x 13A switched & 1x euromod 50x50 module <b>85+, 65+</b>	578	 1x single 13A switched and 1x 1 gang aperture	575
 Plate to accept 1x US Decora duplex panel mount <b>85+</b>	571	 1x standard 2 gang aperture	586
 1x dished 2 gang aperture <b>85+</b>	586D	 2x standard 1 gang apertures	558
 2x standard 1 gang apertures - dished <b>85+</b>	558D	 3x Euromod 50x50 module <b>85+(65)</b>	559-S
 4x LJ6C cut outs angled plates <b>85+</b>	593	 6x LJ6C cut outs (22.4x36.4mm) <b>85+(65)</b>	591-S




SHAPE



Square (as standard)



Round (as standard)




Bespoke

FINISH

Standard finishes




Brass-Satin



Stainless Steel-Satin


Special finishes




Antique Bronze  
lacquer finish




Jordan Bronze  
lacquer finish




Antique Brass  
lacquer finish



Powdercoat finish to most  
RAL colours, including:  
Bronze, Black



Mirror polished stainless  
steel



Mirror polished brass

OPTIONS



Lock




Mousehole cable exit



Brush cable exit



Flat lid (metal top; no  
recess)




Extra strength lid



Retrofit



Trim Flange



Spigot for in screed  
trunking



IP65 when not in use